



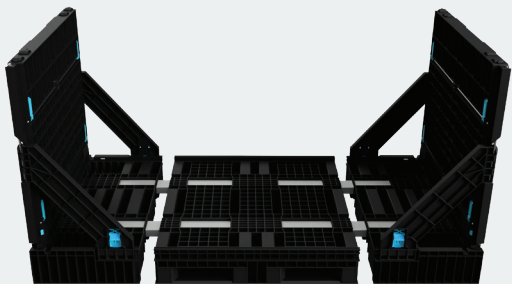

PVpallet Series X.L

SERIES X WITH EXTENDED BASE



BASE EXTENSION PARAMETERS

The Series X.L base extension increases the length of our Series X model to meet the needs of the growing solar market. Third party testing on this design ensures the same quality standards as our other product lines. To ensure the safety of your team, please note the following use restrictions when using the extended base:

- Stacking max = 2 high
- Cargo weight limit = 2,000 lb
- Always follow banding guidelines for loads in transit

DIMENSIONS

Outside Dim. (L x W x H)	96.5 x 48 x 50.1 in (2451 x 1219 x 1273 mm)
Collapsed Height	10.5 in (266 mm)
Max. Inside Dim (L x W x H)	90* x 44.8 x 42.2 in (2286* x 1138 x 1072 mm)
Min. Inside Dim (L x W x H)	70* x 44.8 x 42.2 in (1788* x 1138 x 1072 mm)
Side Wall Dim (L x W x H)	44.9 x 3.25 x 42.2 in (1141 x 83 x 1072 mm)
Min. Fork Length: 48" Side	72 in (1829 mm)
Min. Fork Length: 96.5" Side	42 in (1067 mm)

CAPACITY

Module Capacity	32 (35 mm) 27 (40 mm)
Max Cargo Weight	2000 lb** (907 kg)
Max Cargo Weight—Stacked	2000 lb** (907 kg)
Max Stack: Indoor	2 High
Max Stack: Outdoor	1 High
Max Dynamic Stack	1 High

SHIPPING

53' Trailer Load	24 loaded / 120 collapsed
Truck Stack Height	2 erect / 10 collapsed
40' Trailer or HC Container	8 loaded / 36 collapsed
Base Weight	214 lb (97 kg)
Wall + Braces Weight	53 lb (24 kg) per wall
Total Pallet Weight	320 lb (145.2 kg)

*Standard extension maximum interior length is 90"; custom lengths available upon request. Dimensions may vary in extreme temperatures.

**As all products can have unique loading patterns and shifting characteristics, PVpallet recommends that customers perform their own load capacity testing. PVpallet's standard is to target and test to the maximum weight limits as shown here. PVpallet does not warrant that all loads will perform the same as lab testing.

PVpallet warrants its containers for a period of one year from date of shipment. If within such period a container is proven to be defective due to manufacturing defects, the product will be repaired or replaced. This warranty does not include damage due to normal material handling (e.g. forklift damage, etc.). Customer is responsible for all freight charges.

QUESTIONS?

CALL: 877-PV-PALLET

EMAIL: info@pv-pallet.com

WEB: pv-pallet.com/solar-panel-pallet